


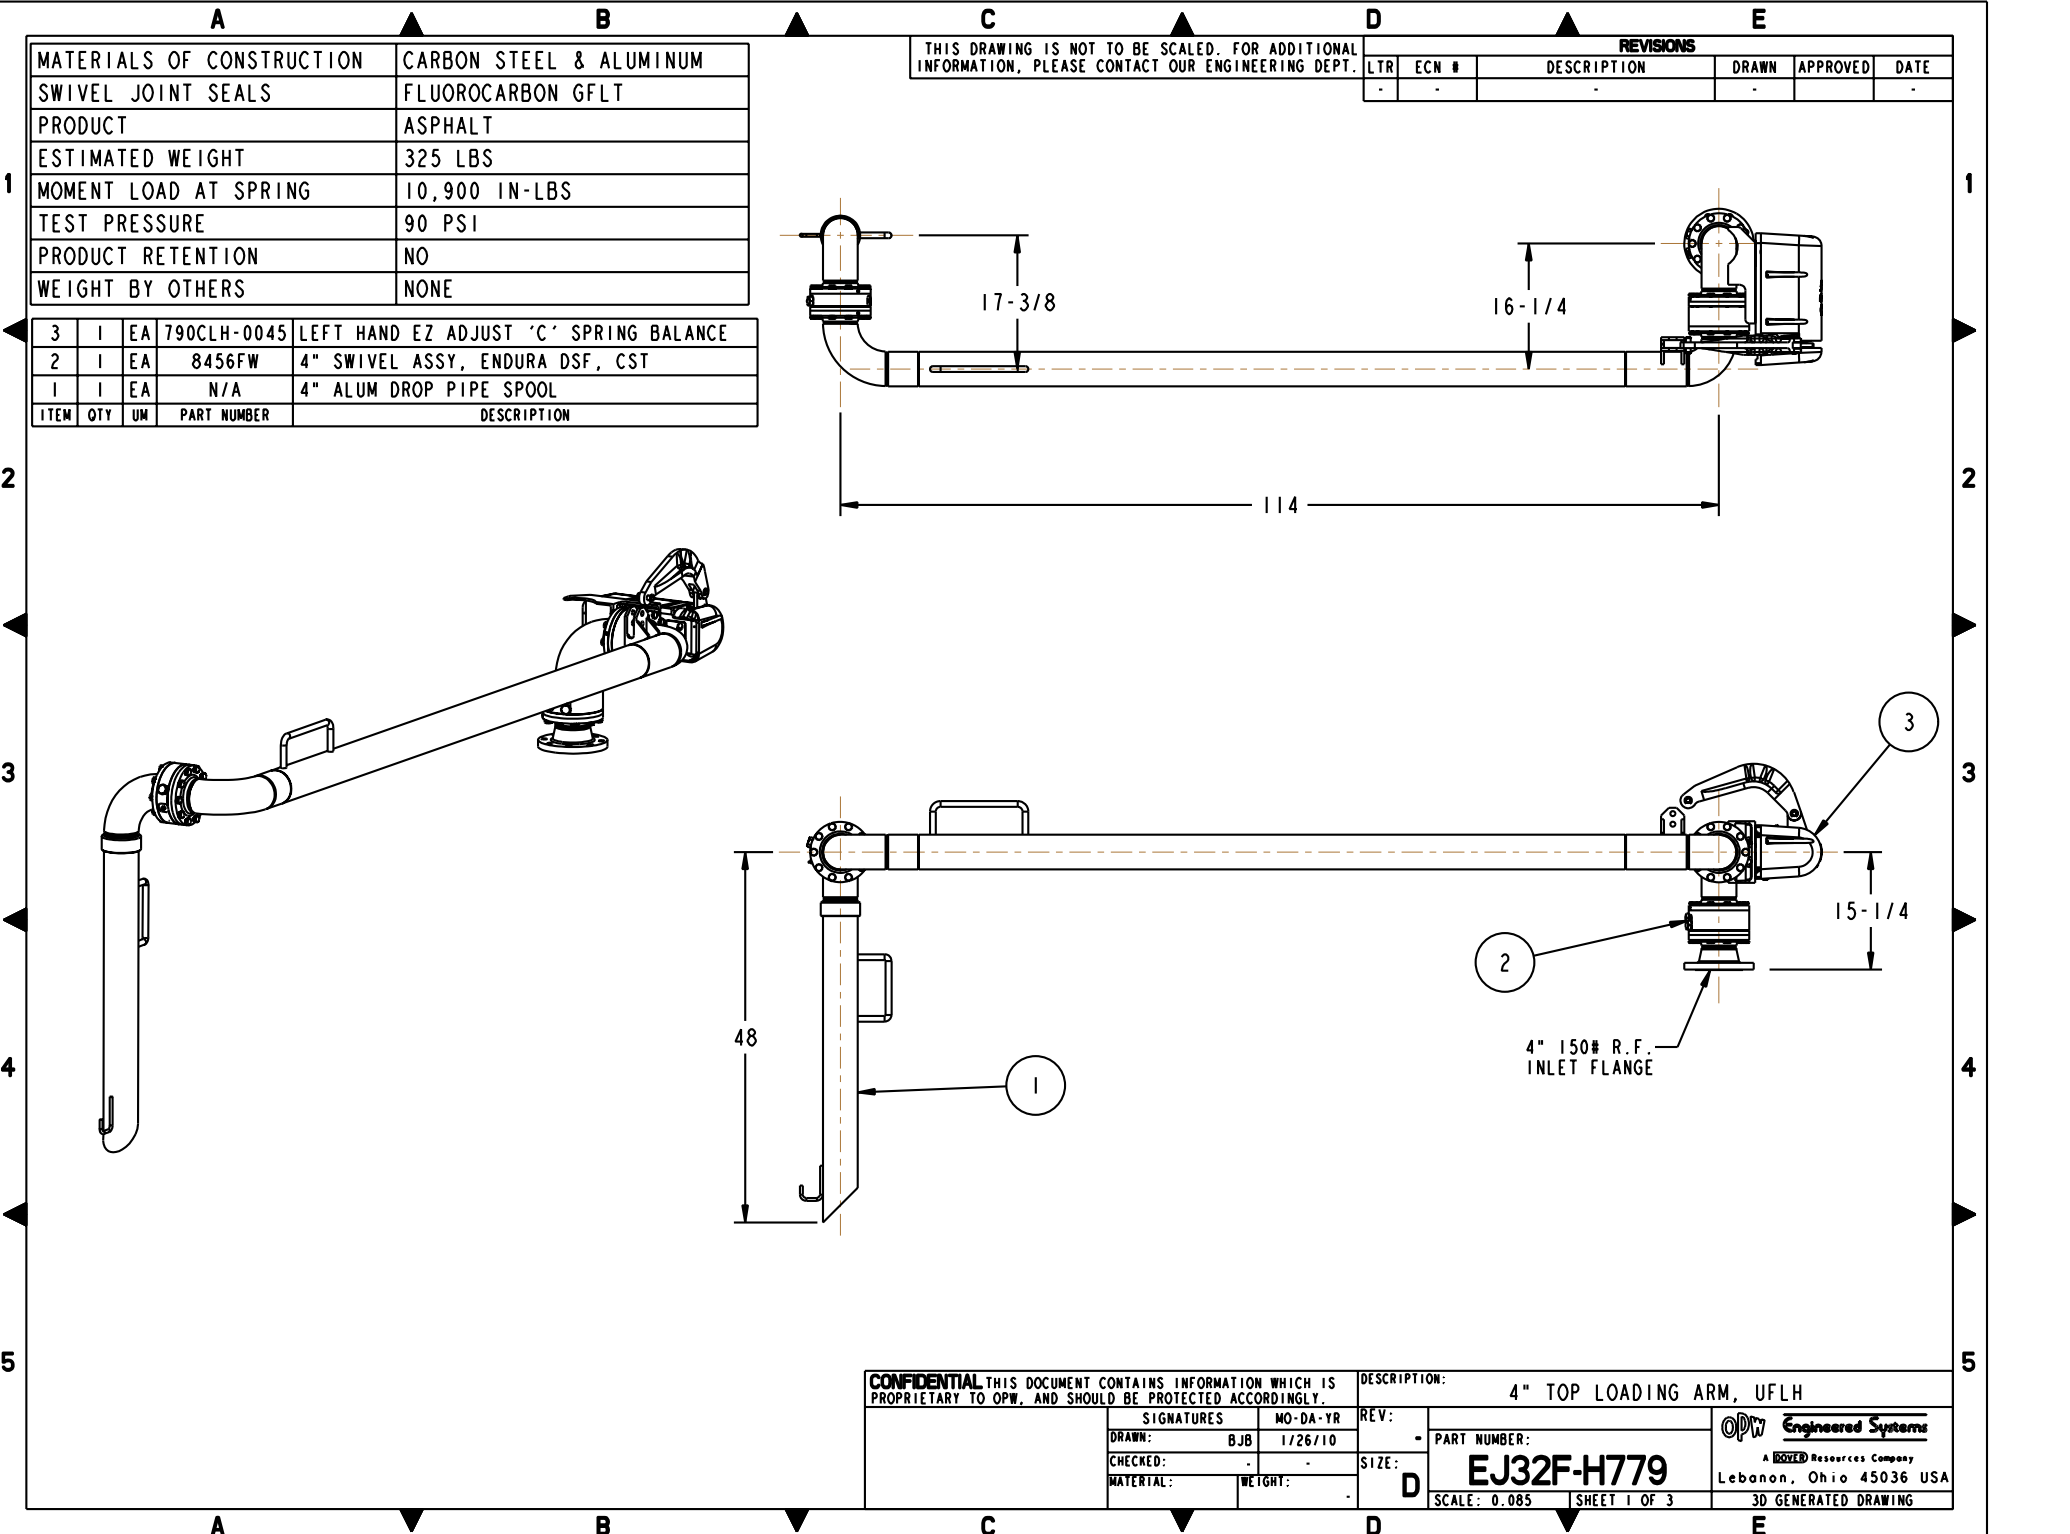

A		B	
MATERIALS OF CONSTRUCTION		CARBON STEEL & ALUMINUM	
SWIVEL JOINT SEALS		FLUOROCARBON GFLT	
PRODUCT		ASPHALT	
ESTIMATED WEIGHT		325 LBS	
MOMENT LOAD AT SPRING		10,900 IN-LBS	
TEST PRESSURE		90 PSI	
PRODUCT RETENTION		NO	
WEIGHT BY OTHERS		NONE	

3	I	EA	790CLH-0045	LEFT HAND EZ ADJUST 'C' SPRING BALANCE
2	I	EA	8456FW	4" SWIVEL ASSY, ENDURA DSF, CST
1	I	EA	N/A	4" ALUM DROP PIPE SPOOL
ITEM	QTY	UM	PART NUMBER	DESCRIPTION

THIS DRAWING IS NOT TO BE SCALED. FOR ADDITIONAL INFORMATION, PLEASE CONTACT OUR ENGINEERING DEPT.

REVISIONS					
LTR	ECN #	DESCRIPTION	DRAWN	APPROVED	DATE
-	-	-	-	-	-

CONFIDENTIAL THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO OPW, AND SHOULD BE PROTECTED ACCORDINGLY.

SIGNATURES		MO-DA-YR	REV:	DESCRIPTION: 4" TOP LOADING ARM, UFLH	
DRAWN: BJB		1/26/10	-	PART NUMBER: EJ32F-H779	
CHECKED: -		-	SIZE: D	SCALE: 0.085 SHEET 1 OF 3	
MATERIAL: -		WEIGHT: -	-	3D GENERATED DRAWING	

OPW **Engineered Systems**
A **BOYD** Resources Company
Lebanon, Ohio 45036 USA